

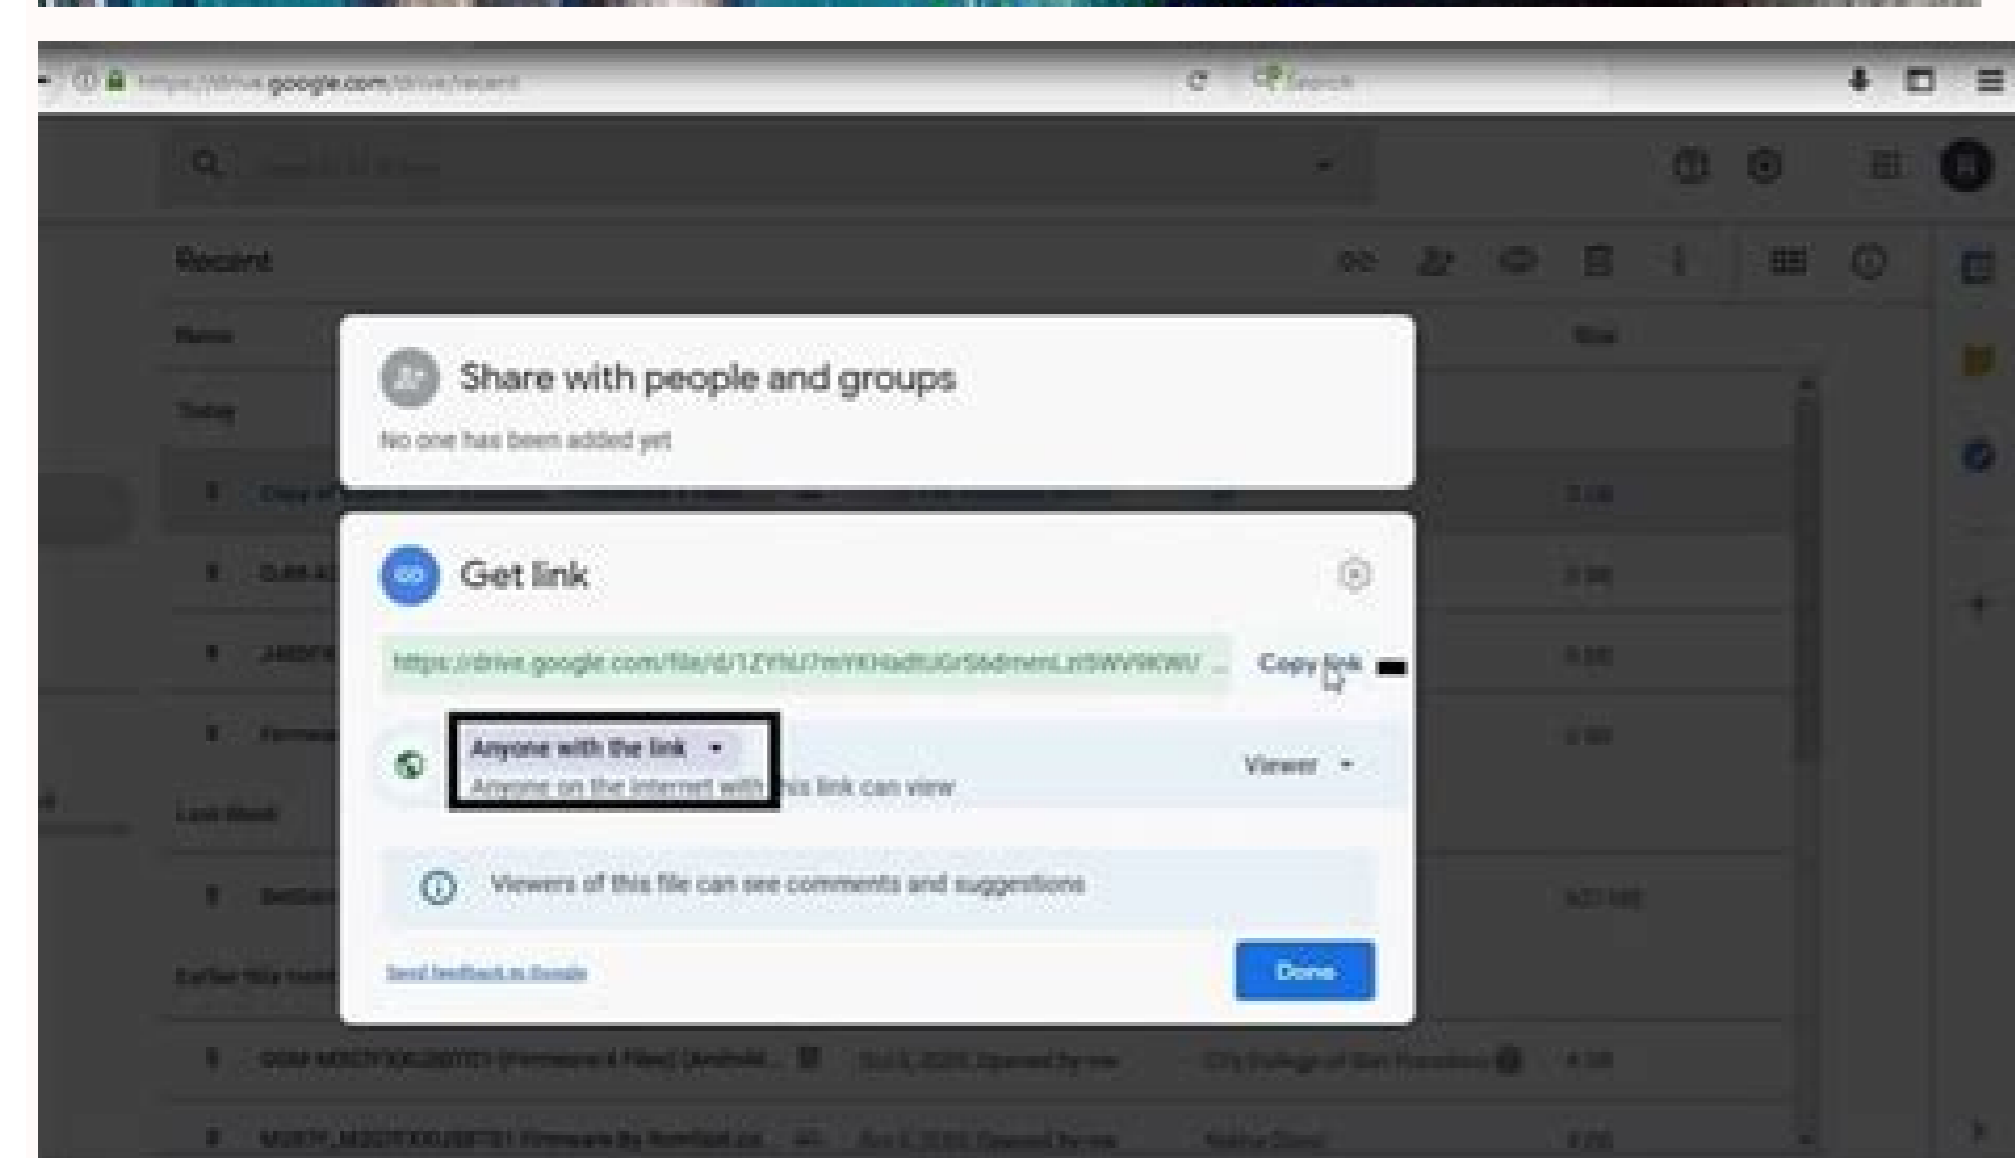
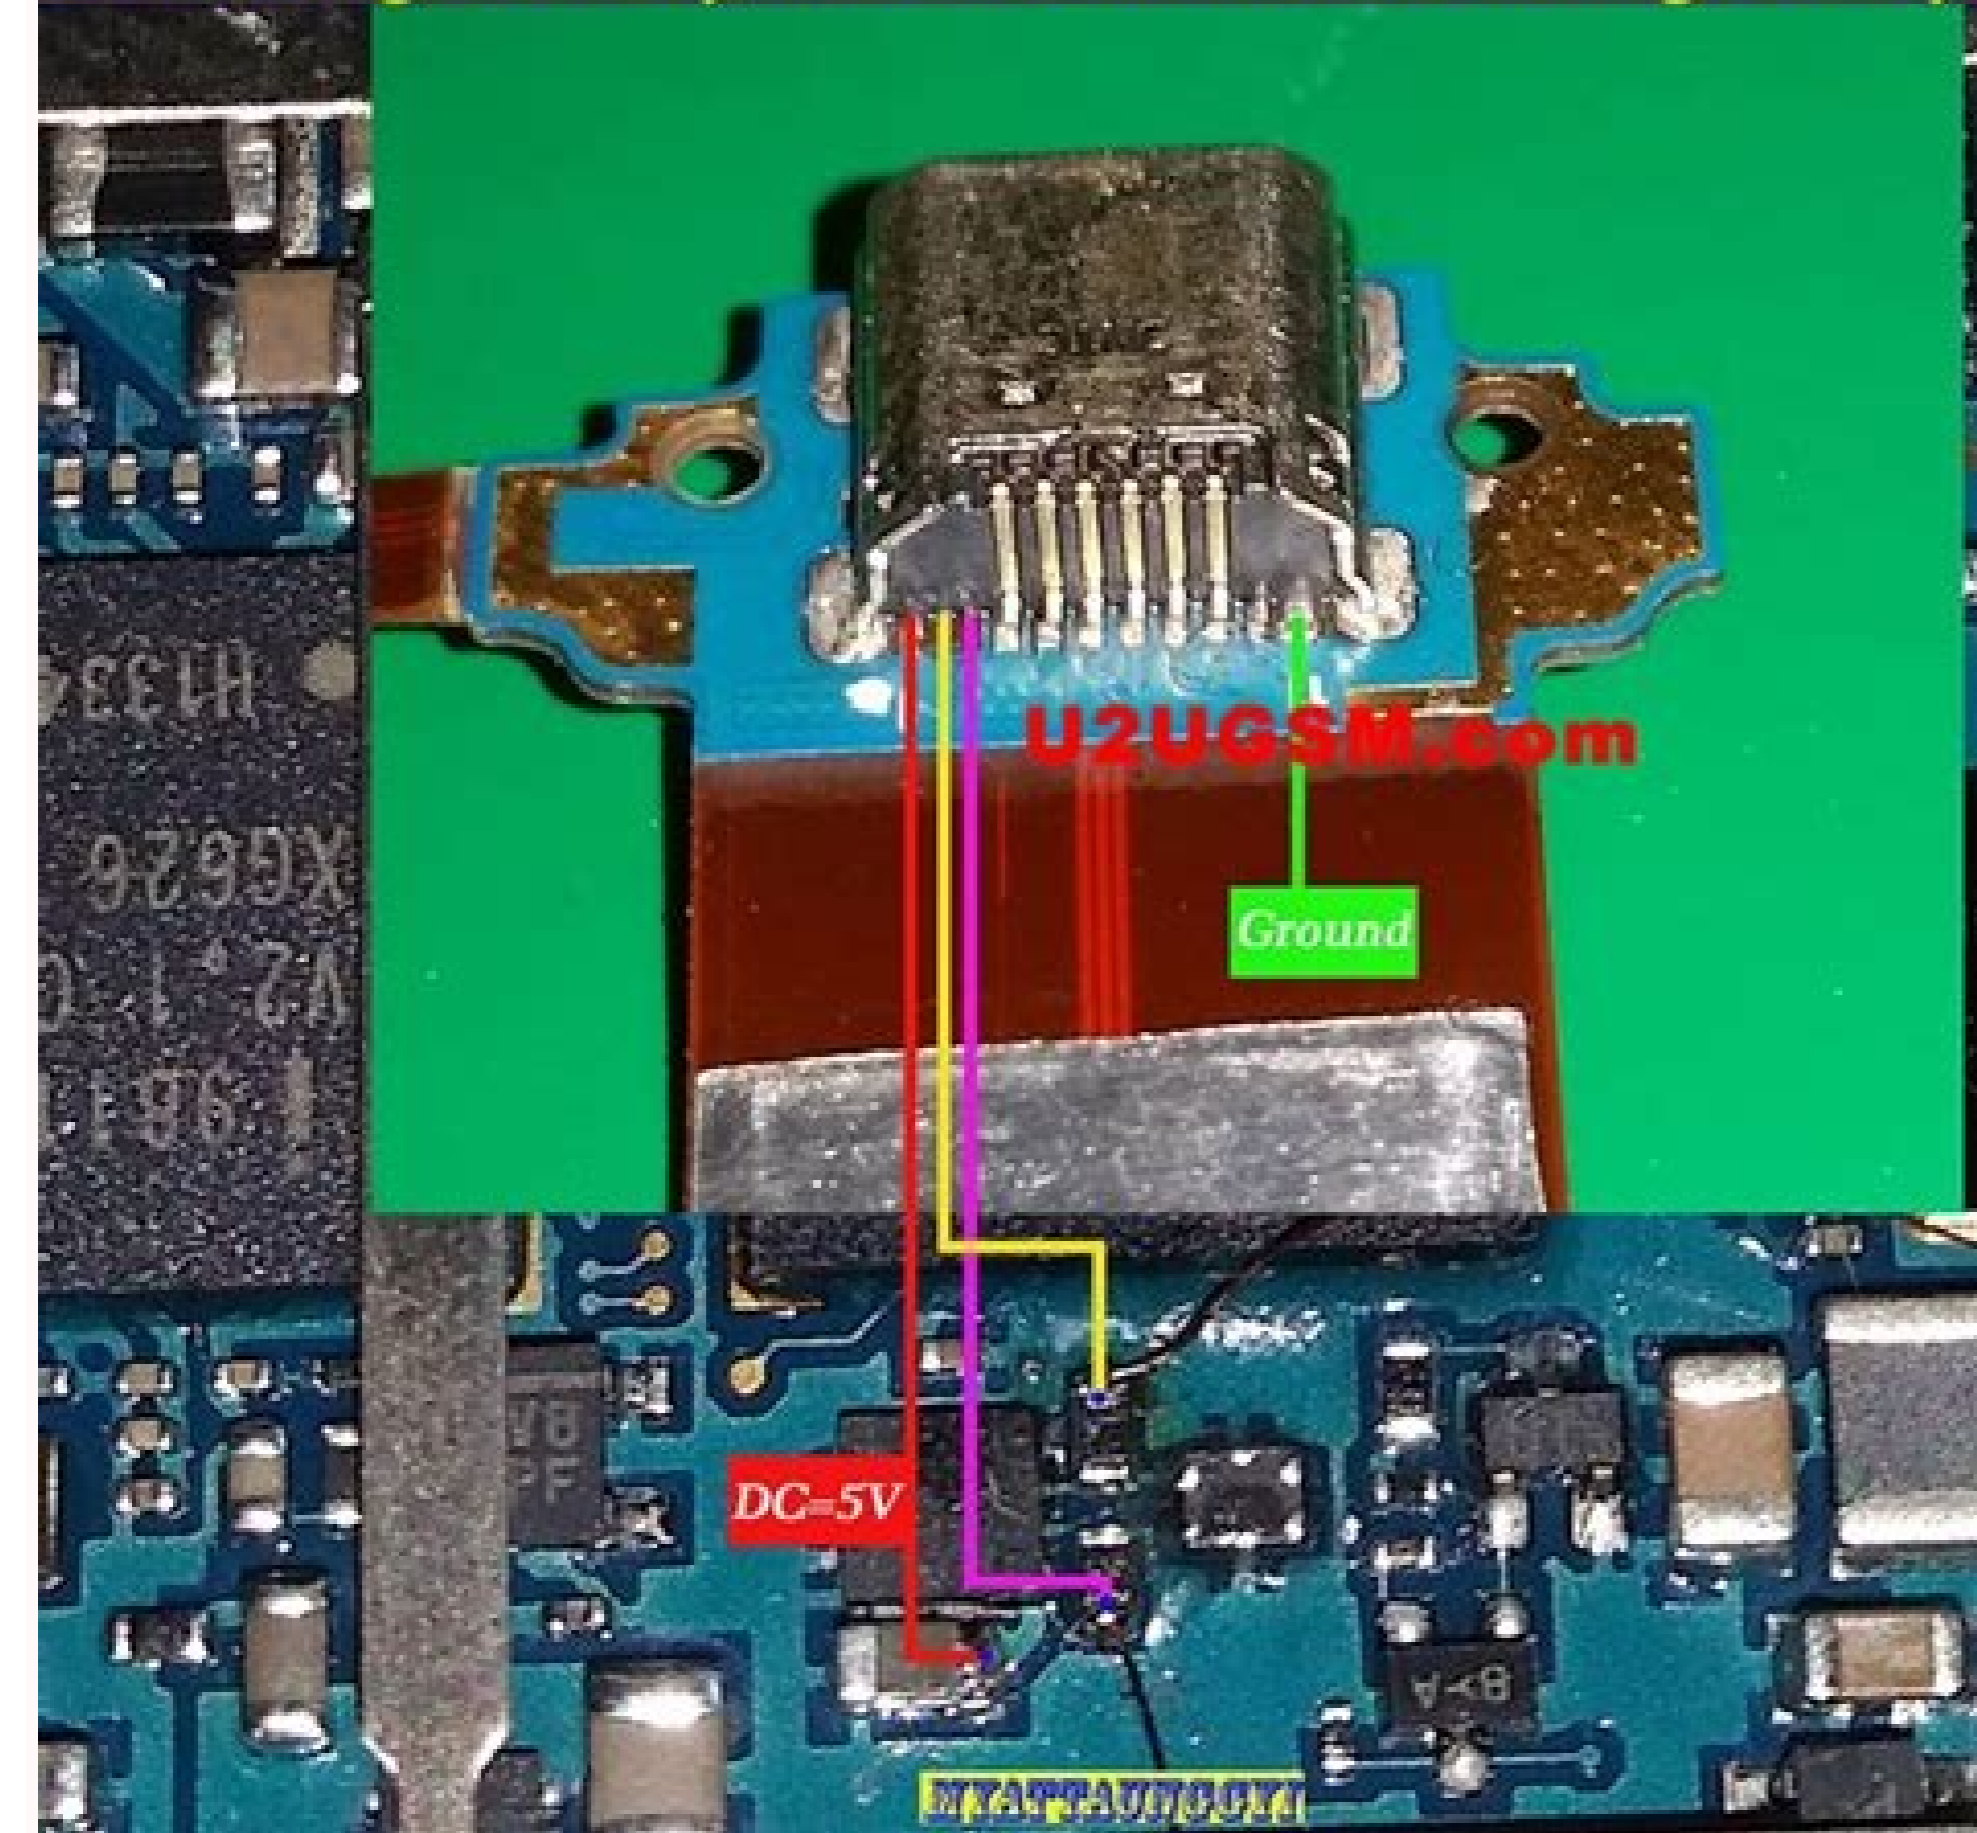


Continue

Samsung Galaxy Tab3 GT-P5200 Charger way

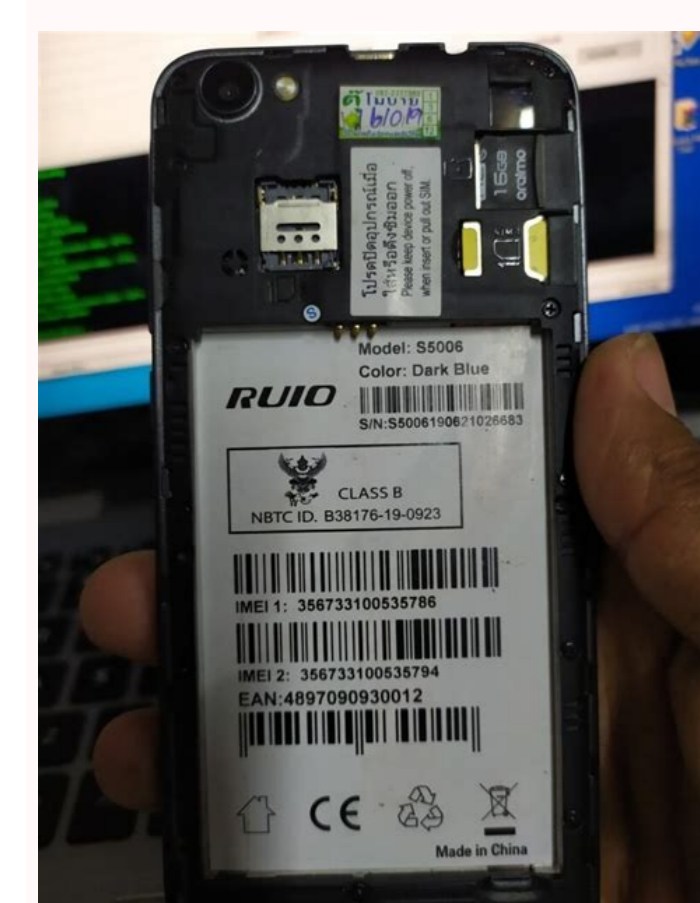

Samsung J5 Prime SM-G570Y Repair Firmware 4Files with pit file U2/B2/S2 Vietnam (XXV)

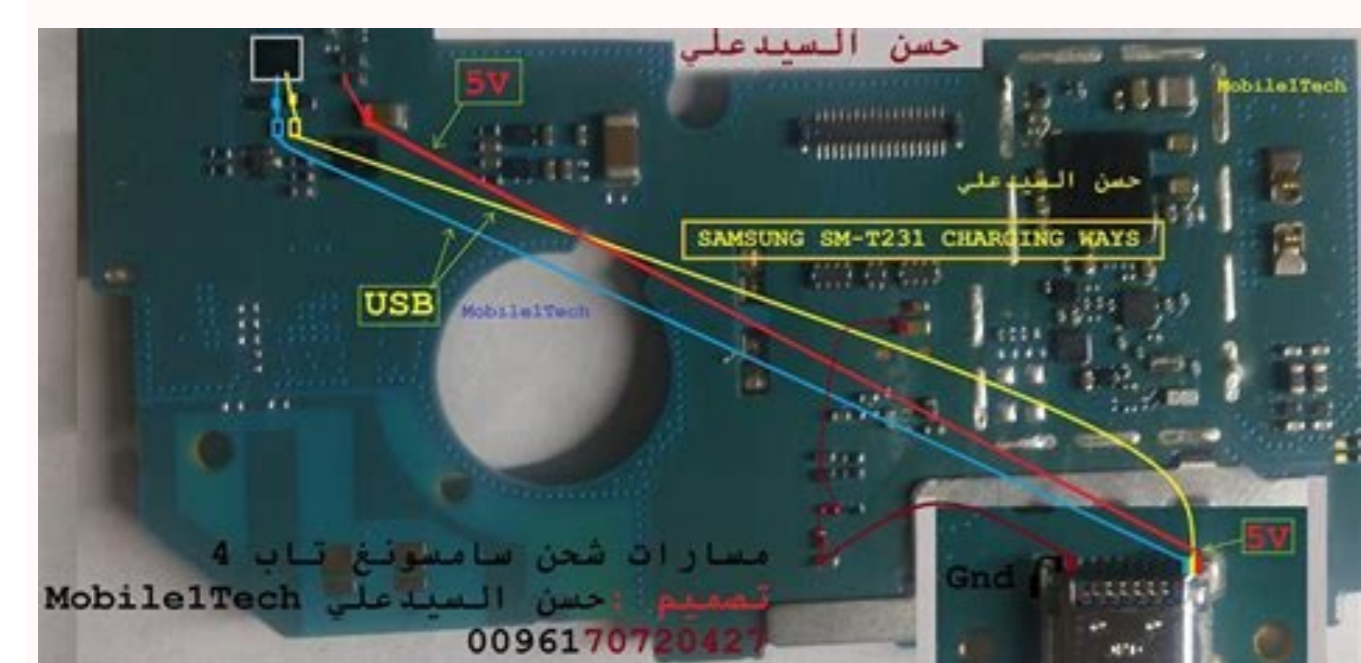

GUIDE TO FLASH SAMSUNG GALAXY CORE 2 SM-G355H CLONE MT6572 V1 CLONE FIRMWARE FREE DOWNLOAD INFO: Sync... Initial Boot Ok! BB_CPU_PID : 6572 BB_CPU_NME : [MediaTek] MT6572_S00 BB_CPU_EXT : 0xCA01, 0x8A00, 0x0000 Processing BROM stage Settings for BROM configured! SecCfgVal : 0x00000000 BromVer : 0x00FF BLVersion : 0x0001 PreLoader : Active [Boot with PL] BootLdrSS : NORMAL with SPRELOADER Processing DA stage DA Select done, will use MTK AllInOne_DA v5.1624.16.07 Sending and initialize DA ... Running DA ver.4.2 on BBID : 0x88 NAND Flash : NOT INSTALLED eMMC Flash : 90014A4834473164040501A1E1D4818F Initialize Memory ... DRAM already initialized by Preloader Dagent sent , init HW now eMMC FlashC initialized [eMMC] : FLASH_VEN : 0x90, OEM : 014A [eMMC] : FLASH_INF : [HYNIX], d1G4 [eMMC] : FLASH_CID : 90014A4834473164040501A1E1D4818F [eMMC] : FLASH_BRT : 0x00400000, 0x00400000, 0x00400000 [eMMC] : FLASH_LEN : 0x00000000E9000000 [eMMC] : FLASH_UCP : 3728 MIB [eMMC] 4 GiB] DEV RID : 0x20000000 EXT RAM : 0x20000000 [512 MIB] BOOT TYPE : EMMC_FLASH_BOOT SOC VERIFY : C1 Boot Ok! Reading Flash Content now ... Brand : Samsung ProdName : SM-G355H ProdModel : SM-G355H Device : Samsung SM-G355H AndroidVer : 4.4.2 MTKxCPU : MT6572 MTKxPRJ : ALPS.KK1.M7.V1 [Read Ok] : preloader.keytak72_cwet_lca.bin [Read Ok] : MBR [Read Ok] : EBRI [Read Ok] : lk.bin [Read Ok] : boot.img [Read Ok] : recovery.img [Read Ok] : secro.img [Read Ok] : logo.bin [Read Ok] : system.img [Read Ok] : cache.img [Read Ok] : userdata.img [ScatCFG] : MT6572 / V1.1.1 / keytak72_cwet_lca / EMMC Android Info saved MAUI Meta DB saved HWConfig Info saved FW Size : 955 MiB This is for Core 2 Clone only. Your device must have 70% Of battery. You need a Laptop or PC to perform this Action. Download the right firmware for Core 2 clone from the link below. Make sure you have followed the steps properly. Don't Skip and Read! We are not responsible for any damage that you make to your Phone. WHY YOU NEED TO FLASH YOUR PHONE!! You need this firmware/stock rom if you have encountered this kind of problem in your Smartphone Listed Below: 1.Hang on logo.2.Rebooting.3.Bootloop & Dead boot after a wrong software.4.Virus & Sexual Apps.5-System crashing How to know if the phone had a hard problem (Emmc problem)? What is Emmc problem? also called read mode only, it means that your internal memory doesnt accept command, so the phone stay on the same condition after a software or a hard reset. if the phone hang on logo after flash, you are facing Emmc problem. As a precaution you shouldn't change setting in SP flashtool from Download only to format+download, you will end with a dead phone if you have a Emmc problem ofcourse. DOWNLOAD AREA: How To Flash Via SP FLASHTOOL? 1-Requirements: A Computer PC Run Windows XP or above Usb data cable (not a generic cable) Mtk usb drivers installed manually, you will find instruction bellow Your Mtk Smartphone Face a soft issue Original stock rom (you can find it above in download section) The latest SP Flashtool version 2-How to install VCOM Drivers: Open device manager from my PC or my computer. Click on any item and go to actions > Add legacy hardware Now, press next and select install drivers manually Press next and click on have disk from the browse option, select VCOM drivers From mtk drivers folder Once its done, you will see a screen similar to this: Once you are done with the driver installation, go to device manager > Ports (COM&LPT) you will find a device similar to this: 3-How to flash rom using SP flashtool?: Power the phone off, remove the battery from the smartphone and put it back without booting the phone (if the battery is inside then simply switch it off). Launch SP Flashtool *Double clicks onFlash_tool.exe Click on scatter-loading option and browse to the scatter file of your stock rom choose MTxxxx_android.txt (scatter.txt). Dont touch any options, Keep the original setting (In case you want to format device before flash press choose format+download but it'snt recommended because you will be ended with an EMEI null) If you phone is alive and has a software issue (contain virus, Stuck on logo, apps setting problem, blink, or not work as expected) I advise you to Uncheck Preloader as a precaution. On contrary check all partitions (In case you have a boot problem (you phone does'nt boot when you try to power on it). Once you are done with everything, click on the download button at the top of the software. Stop should now be prominent while other options should be grayed out Connect your switched off phone with battery inside to PC via Usb cable A progressbar should start running In the end of an success flash process, a box should show up with green OK symbol inside Disconnect the phone, remove the battery, slot it back in then power the phone. tUUXBJTbUyyCLqr0rRmzxY35y-ZKlg7fBoPG05UwDMvh9wr5cHM Use the link on this page to download the original and tested Samsung SM-G355H Flash File Firmware (Stock ROM). Samsung SM-G355H Flash File (Firmware)To download the proper firmware, please choose the relevant file according to your mobile device

